



FRONIUS SYMO ADVANCED UL

Specially developed for the requirements of tomorrow



PC board replacement concept



SnapInverter Technology




Integrated Data Communication



Smart Grid Ready



SuperFlex Design



Dynamic Peak Manager

Featuring models ranging from 10 kW to 24 kW, the Fronius Symo Advanced is the ideal inverter for commercial applications. The new Advanced versions combine the benefits of the Fronius Symo with additional features zero tilt mounting, light weight and field serviceability.

TECHNICAL DATA FRONIUS SYMO ADVANCED (208-240 V VERSIONS)

INPUT DATA	SYMO 10.0-3 208-240		SYMO 12.0-3 208-240	
	208 V	240 V	208 V	240 V
Max. PV generator output ($P_{dc\ max}$)	15 kW _{peak}		18 kW _{peak}	
Max. input current ($I_{dc\ max1}$ / $I_{dc\ max2}$)			25 A / 16.5 A	
Max. array short circuit current (MPP1 / MPP2)			37.5 A / 24.8 A	
Nominal input voltage	350 V	370 V	350 V	370 V
DC input voltage range ($U_{dc\ min}$ + $U_{dc\ max}$)			200 - 600 V	
Feed-in start voltage ($U_{dc\ start}$)			200 V	
Usable MPP voltage range ($U_{mpp\ min}$ + $U_{mpp\ max}$)			300 - 500 V	
Max. input voltage			600 V	
Admissible conductor size DC	AWG 14-AWG 6 copper direct, AWG 6 aluminum direct, AWG 4-AWG 2 copper or aluminum with input combiner			
Number of MPP trackers	2			

OUTPUT DATA	SYMO 10.0-3 208-240		SYMO 12.0-3 208-240	
	208 V	240 V	208 V	240 V
AC nominal output ($P_{ac,r}$)	9,995 W		11,995 W	
Max. output power	9,995 VA		11,995 VA	
Output configuration			208 / 240 V	
Frequency range (f_{min} - f_{max})			45 - 60 Hz	
Admissible conductor size AC	AWG 14 - AWG 6			
Total harmonic distortion	< 1.5 %		< 1.75 %	
Power factor ($\cos \phi_{ac,r}$)			0-1 ind. / cap.	
Max. continuous output current	27.7 A	24 A	33.3 A	28.9 A
OCPD/AC breaker size	35 A	30 A	45 A	40 A

EFFICIENCY	SYMO 10.0-3 208-240		SYMO 12.0-3 208-240	
	208 V	240 V	208 V	240 V
Max. Efficiency			97.0 %	
CEC Efficiency	96.5 %		96.5 %	

TECHNICAL DATA FRONIUS SYMO (208-240 V VERSIONS)

GENERAL DATA	SYMO 10.0-3 208-240	SYMO 12.0-3 208-240
Dimensions (height x width x depth)	510 x 725 x 225 mm (20.1 x 28.5 x 8.9 inches)	
Weight	41.7 kg (91.9 lbs)	
Protection Class	NEMA 4X	
Night time consumption	< 1 W	
Inverter topology	Transformerless	
Cooling	Regulated air cooling	
Installation	Indoor and outdoor installation, tilt from 0 - 90 degrees ¹	
DIN rail (length x width x depth)	max. 106 x 90 x 66 mm (max. 4.2 x 3.5 x 2.6 inches)	
Ambient operating temperature range	-40 - +60 °C (-40 - +140 °F)	
Permitted humidity	0 - 100 % (non-condensing)	
Elevation	max. input voltage of 600 V up to 3,400 m (11.155 ft)	
DC connection technology	6x DC+ and 6x DC- screw terminals for copper (solid / stranded / fine stranded) or aluminum (solid / stranded)	
AC connection technology	Screw terminals 14-6 AWG	

¹ Fronius Shade Cover required for installation angles less than 15 degree

PROTECTIVE DEVICES	SYMO 10.0-3 208-240	SYMO 12.0-3 208-240
DC reverse polarity protection	Yes	
Anti islanding	Yes	
Over temperature protection	Output power derating /Active cooling	
Ground Fault Protection with Isolation Monitor Interrupter	Yes	
DC disconnect	Yes	


INTERFACES	SYMO 10.0-3 208-240	SYMO 12.0-3 208-240
USB (A socket)	Datalogging and inverter update possible via USB	
2x RS422 (RJ45 socket)	Fronius Solar Net, interface protocol	
Wi-Fi/Ethernet/Serial/ Datalogger and webserver ²	Wireless standard 802.11 b/g/n / Fronius Solar.web, SunSpec Modbus TCP, JSON / SunSpec Modbus RTU	
6 inputs and 4 digital I/Os ²	Load management; signaling, multipurpose I/O	

² Available with the Fronius Datamanager 2.0 Card (only one card required for up to 100 inverters)


TECHNICAL DATA FRONIUS SYMO (480 V VERSIONS)

INPUT DATA	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
Max. PV generator output ($P_{dc\ max}$)	22.5 kW _{peak}	30 kW _{peak}	34 kW _{peak}	36 kW _{peak}
Max. input current ($I_{dc\ max1} / I_{dc\ max2}$)	33 A / 25 A			
Max. array short circuit current (MPP1 / MPP2)	49.5 A / 37.5 A			
Nominal input voltage	685 V	710 V		720 V
DC input voltage range ($U_{dc\ min} + U_{dc\ max}$)	200 - 1,000 V			
DC startup voltage	200 V			
Usable MPP voltage range ($U_{mpp\ min} + U_{mpp\ max}$)	350 - 800 V	450 - 800 V		500 - 800 V
Max. input voltage	1,000 V			
Admissible conductor size DC	AWG 14 - AWG 6 copper direct, AWG 6 aluminum direct, AWG 4 - AWG 2 copper or aluminum with input combiner			
Number of MPP trackers	2			

FRONIUS SYMO 24.0-3 480 CEC EFFICIENCY CURVE

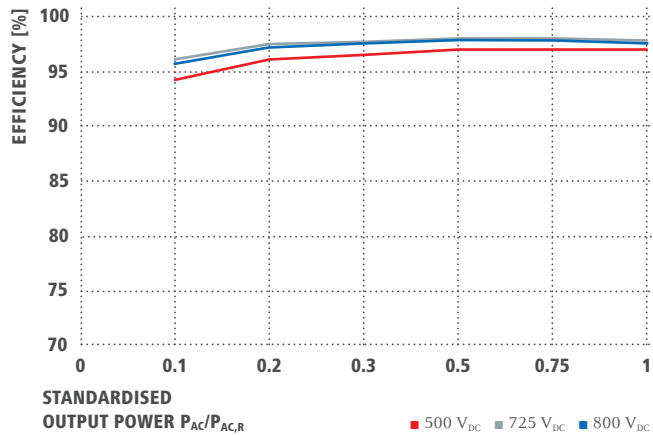

FRONIUS SYMO 24.0-3 480 TEMPERATURE DERATING CURVE

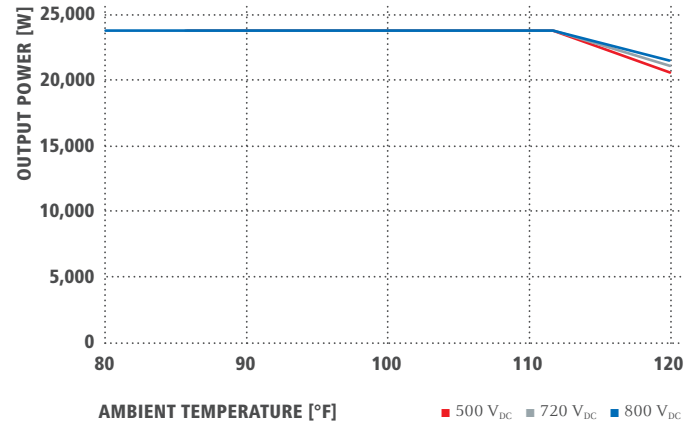

TECHNICAL DATA FRONIUS SYMO (480 V VERSIONS)

OUTPUT DATA	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
AC nominal Output ($P_{ac,r}$)	14,995 W	19,995 W	22,727 W	23,995 W
Max. output power	14,995 VA	19,995 VA	22,727 VA	23,995 VA
Grid connection	480 / 277 V WYE ³			
Frequency (frequency range $f_{min} - f_{max}$)	60 Hz (45 - 65 Hz)			
Admissible conductor size (AC)	AWG 14-AWG 6			
Total harmonic distortion	< 1.5 %	< 1 %	< 1.25 %	< 1 %
Power factor ($C_{OS,ac,r}$)	0-1 ind. / cap.			
Max. continuous output current	18 A	24 A	27.3 A	28.9 A
OCPD/AC breaker size	25 A	30 A	35 A	40 A

EFFICIENCY	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
Max. Efficiency	98 %			
CEC Efficiency	97 %	97.5 %		

GENERAL DATA	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
Dimensions (height x width x depth)	510 x 725 x 225 mm (20.1 x 28.5 x 8.9 inches)			
Weight	43.4 kg (95.7 lbs)			
Protection Class	NEMA 4X			
Night time consumption	< 1 W			
Inverter topology	Transformerless			
Cooling	Regulated air cooling			
Installation	Indoor and outdoor installation, tilt from 0 - 90 degree ⁴			
DIN rail (length x width x depth)	max. 106 x 90 x 66 mm (max. 4.2 x 3.5 x 2.6 inches)			
Ambient operating temperature range	-40 - +60 °C (-40°F - + 140 °F)			
Permitted humidity	0 - 100 % (non-condensing)			
Elevation	2000 m (6562 ft) with a max. input voltage of 1000 V / 3400 m (11155 ft) with a max. input voltage of 850 V			
DC connection technology	6x DC+ and 6x DC- screw terminals for copper (solid / stranded / fine stranded) or aluminum (solid / stranded)			
AC connection technology	Screw terminals 14-6 AWG			

³ +N for sensing purposes - no current carrying conductor

⁴ Fronius Shade Cover required for installation angles less than 15 degree

PROTECTIVE DEVICES	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
DC reverse polarity protection			Yes	
Anti islanding			Yes	
Over temperature protection			Output power derating / Active cooling	
Ground Fault Protection with Isolation Monitor Interrupter			Yes	
DC disconnect			Yes	

INTERFACES	SYMO 15.0-3 480	SYMO 20.0-3 480	SYMO 22.7-3 480	SYMO 24.0-3 480
USB (A socket)			Datalogging and inverter update possible via USB	
2x RS422 (RJ45 socket)			Fronius Solar Net, interface protocol	
Wi-Fi/Ethernet/Serial/ Datalogger and webserver ²		Wireless standard 802.11 b/g/n / Fronius Solar.web, SunSpec Modbus TCP, JSON / SunSpec Modbus RTU		
6 inputs and 4 digital I/Os ²		Load management; signaling, multipurpose I/O		

² Available with the Fronius Datamanager 2.0 Card (only one card required for up to 100 inverters)

/ Perfect Welding / Solar Energy / Perfect Charging

THREE BUSINESS UNITS, ONE GOAL: TO SET THE STANDARD THROUGH TECHNOLOGICAL ADVANCEMENT.

What began in 1945 as a one-man operation now sets technological standards in the fields of welding technology, photovoltaics and battery charging. Today, the company has around 5,660 employees worldwide and 1,321 patents for product development show the innovative spirit within the company. Sustainable development means for us to implement environmentally relevant and social aspects equally with economic factors. Our goal has remained constant throughout: to be the innovation leader.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com

Fronius Canada Ltd.
 2875 Argenta Road, Units 4, 5 & 6
 Mississauga, ON L5N 8G6
 Canada
pv-sales-canada@fronius.com
www.fronius.ca

Fronius Australia Pty Ltd.
 90-92 Lambeck Drive
 Tullamarine VIC 3043
 Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius International GmbH
 Froniusplatz 1
 4600 Wels
 Austria
pv-sales@fronius.com
www.fronius.com